

# CL Challenger Lifts



**Model#: 40EFX**

Surface Mounted 4-Post Lift  
12,000 lb. lifting capacity

## 40series 4-Post Lifts

Expand your service offering and increase your revenue potential with Challenger Lifts' 12,000 lb. four-post lifts.

Our 40series is loaded with features you would expect to pay more for, like solid piece column construction, automatic wheel stops, wheel curbs and anti-skid coating on runways to minimize slipping, etc.

With optional rolling jacks, bolt-on alignment kit, oil drain pan, etc., you'll be able to accommodate just about anything that comes in for service.


	Narrow Bay	Standard Length	Extended Length	XL Extended Length	Open Front Extended	Open Front XL Extended
<b>Model Number</b>	<b>40NFX</b>	<b>40SFX</b>	<b>40EFX</b>	<b>40XFX</b>	<b>40EFO</b>	<b>40XFO</b>
Lifting Capacity	12,000 lb. (5443kg)	12,000 lb. (5443kg)	12,000 lb. (5443kg)	12,000 lb. (5443kg)	12,000 lb. (5443kg)	12,000 lb. (5443kg)
Max. Wheelbase <sup>1</sup>	157 1/2" (4001mm)	157 1/2" (4001mm)	182 1/2" (4636mm)	210" (5334mm)	182 1/2" (4636mm)	210" (5334mm)
<b>A</b> Rise Height	79" (2007mm)				79" (2007mm)	
<b>B</b> Length Overall	18' 3" (5563mm)	18' 3" (5563mm)	20' 4" (6198mm)	22' 7 1/2" (6896mm)	20' 8 1/2" (6312mm)	23' (7010mm)
<b>C</b> Width Overall	10' 1" (3073mm)	10' 11" (3327mm)			11' 10" (3607mm)	
<b>D</b> Inside Columns	106" (2692mm)	116" (2946mm)			120" front - 116" rear (3048mm front - 2946mm rear)	
<b>E</b> Between Columns	171" (4343mm)		196" (4978mm)	223 1/2" (5677mm)	195" (4953mm)	222 1/2" (5652mm)
<b>F</b> Height of Columns	90 1/2" (2299mm)				99 1/2" front - 90 1/2" rear (2527mm front - 2299mm rear)	
<b>G</b> Width of Runways	20" (508mm)				20" (508mm)	
<b>H</b> Height of Runways	7" (178mm)				7" (178mm)	
<b>I</b> Width Between Runways (Minimum / Maximum)	40" / 43" (1016mm / 1092mm)				43" (1092mm)	
Air Supply Required	85-115 psi				85-115 psi	
Motor	2HP				2HP	
Voltage (1 Phase Std.) <sup>2</sup>	208v-230v				208v-230v	
Speed of Rise	70 Sec.				70 Sec.	

### Features & Benefits:

- 79" rise height — The highest rise in the industry
- Durable non-skid surfaces for positive vehicle traction and technician safety
- Fully gusseted base plate reduces column deflection and is less sensitive to uneven floors (open front models)
- Oversized solid machined steel pulleys for prolonged

For more information, contact your Authorized Challenger Lifts Distributor.

<sup>1</sup> Maximum wheelbase is based on a tire diameter of 30". | <sup>2</sup> Optional 3 phase electrical also available. Standard lift colors are Red and Blue.

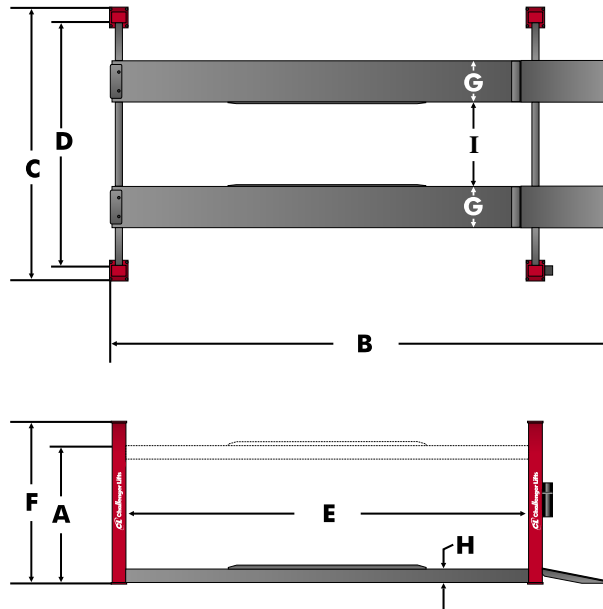

The Automotive Lift Institute (ALI) certifies that the 40series described herein comply with the applicable provisions of the American National Standards ANSI/ALI ALCIV 2006 and are Third Party Validated by the ETL Testing Laboratory.

**CHALLENGER LIFTS, INC.** Phone Toll-Free: 800-648-5438  
200 Cabel Street 502-625-0700  
Louisville, Kentucky 40206 Fax: 502-625-0711

E-mail: [sales@challengelifts.com](mailto:sales@challengelifts.com)

Challenger Lifts, Inc. reserves the right to make changes to specifications without notice and without making changes retroactive. Unloading, installation and oil not included.