

# CL Challenger Lifts



**Model#: MR6**  
Portable Mid-Rise Lift  
6,000 lb. capacity

## MR6

Challenger Lifts' Portable Mid-Rise Lift is a great way to increase the productivity in a shop. It's like having a service bay anywhere, indoors or out.

The motor is conveniently mounted to a Heavy-Duty tow dolly, making it easy to move and operate on almost any solid surface.

Exclusive features include a sliding/rotating arm design with rubber pads, low drive-over clearance, and much more.

## Features & Benefits:

- Portable mid-rise lift with Heavy-Duty tow dolly provides flexibility to service vehicles anywhere, inside or out
- 7 locking positions allow technician to work at an ergonomic height to increase productivity and minimize fatigue
- Electric motor mounted on tow dolly provides convenience and ease of maneuverability
- Single push button power unit with release valve provides convenience when lifting and lowering vehicles
- Slip-on rubber pad adapter kit with height extension accommodates high profile vehicles
- Sliding/rotating arm design accommodates meeting pick-up points on a wider range of vehicles




### Power Unit Features:

Convenient single push button power unit raises lift and a release valve handle lowers it.

For more information, contact your Authorized Challenger Lifts Distributor:

Model Number	MR6
Lifting Capacity	6,000 lb. (2722kg)
A. Rise Height	53 <sup>1</sup> / <sub>4</sub> " (1353mm)
B. Length Overall	7'10" (2388mm)
C.Width Overall	39 <sup>1</sup> / <sub>2</sub> " (1003mm)
D. Min. Collapsed Height	5 <sup>1</sup> / <sub>2</sub> " (140mm)
E. Pad Height (minimum)	8 <sup>1</sup> / <sub>16</sub> " (205mm)
F. Pad Height (maximum)	56 <sup>5</sup> / <sub>16</sub> " (1430mm)
Hydraulic Hose	12' (3658mm)
Safety Lock Positions	7
Electric Motor	1 HP
Voltage	115v
Speed of Rise	45 sec.
Min. Recommended Bay Size	10' x 22' (3048mm x 6706mm)

Standard lift colors are Red (as shown) and Blue.

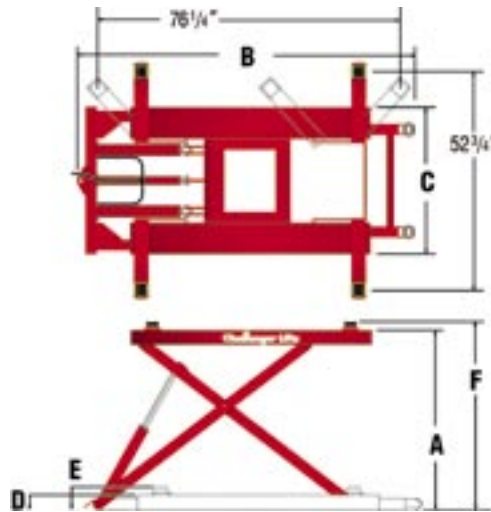

### Locking Positions:

- 53<sup>1</sup>/<sub>4</sub>"
- 48<sup>1</sup>/<sub>8</sub>"
- 45"
- 40<sup>1</sup>/<sub>2</sub>"
- 35<sup>1</sup>/<sub>2</sub>"
- 30"
- 23<sup>7</sup>/<sub>8</sub>"

### standard accessories:



4 high adapters included



4 low adapters included



**CHALLENGER LIFTS, INC.**  
200 Cabel Street  
Louisville, Kentucky 40206

Phone Toll-Free: 800-648-5438  
502-625-0700

Fax: 502-625-0711

E-mail: [sales@challengerlifts.com](mailto:sales@challengerlifts.com)



Challenger Lifts, Inc. reserves the right to make changes to specifications without notice and without making changes retroactive. Unloading, installation and oil not included.